

JU9000V-8950

JUPITER 5 Series: Two-Platen Servo-Hydraulic



Clamping Unit		JU9000V
Clamping Force	kN	9000
Mold Opening Stroke (Min/Max)	mm	1600/1000
Minimum Mold Height	mm	500
Maximum Mold Height	mm	1100
Maximum Daylight	mm	2100
Distance Between Tie-Bars (HXV)	mm	1180×1000
Platen Dimensions (HXV)	mm	1560x1520
Ejector Stroke	mm	300
Ejector Force	kN	195
Maximum Mold Weight*	t	13



Specification



JU9000V-8950

JUPITER 5 Series: Two-Platen Servo-Hydraulic

Injection Unit		8950		
Screw & Barrel Designation		A	B	C
Screw Diameter	mm	100	110	120
Screw L/D Ratio	L/D	24.2	22	20.2
Injection Volume (theoretical)	cm ³	4005	4846	5767
Injection Weight (PS)	g	3645	4410	5248
Injection Rate (PS)	g/s	797	965	1148
Injection Pressure	MPa	196	162	136
Injection Pressure (max)*	MPa	223	184	154
Plasticizing Rate (GPPS)	g/s	120.7	144.8	167.8
Plasticizing Rate (HDPE)	g/s	181.2	217.2	247
Screw Speed	rpm	155	155	155

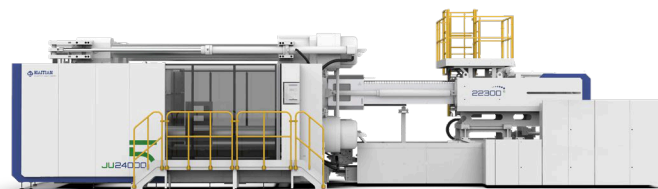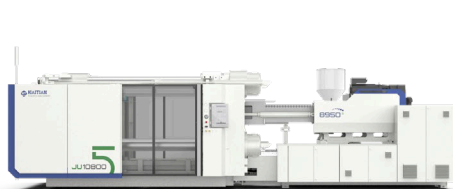


JU9000V-8950

JUPITER 5 Series: Two-Platen Servo-Hydraulic


Other		
Pump Motor Power	kW	127
Heater Power	kW	83
Machine Dimension (LxWxH)	m	9.70×3.19×3.13
Machine Weight	t	39
Hopper Capacity	kg	100
Oil Tank	l	840

***NOTE:**

1. Injection Pressure (max) uses the machine's regeneration oil circuit to increase the injection pressure. This function will reduce injection control and repeatability. The standard "Injection Pressure" specification is the maximum injection pressure in a normal operating mode.
2. Moving platen max mold weight is 2/3 of total max mold weight.
3. Electric screw drive (screw rotate) is standard for injection units under 11500. For injection units 11500 and above electric screw drive is optional.
4. Machine dimensions and weights are based on the international standard configuration and are for reference only. Any options or country specific requirements will affect this. Contact Cabletech Marketing service department for machine specific information.
5. Power requirements are based on the international standard configuration and are for reference only. Any options or country specific requirements will affect this. Contact Cabletech Marketing service department for machine specific information.

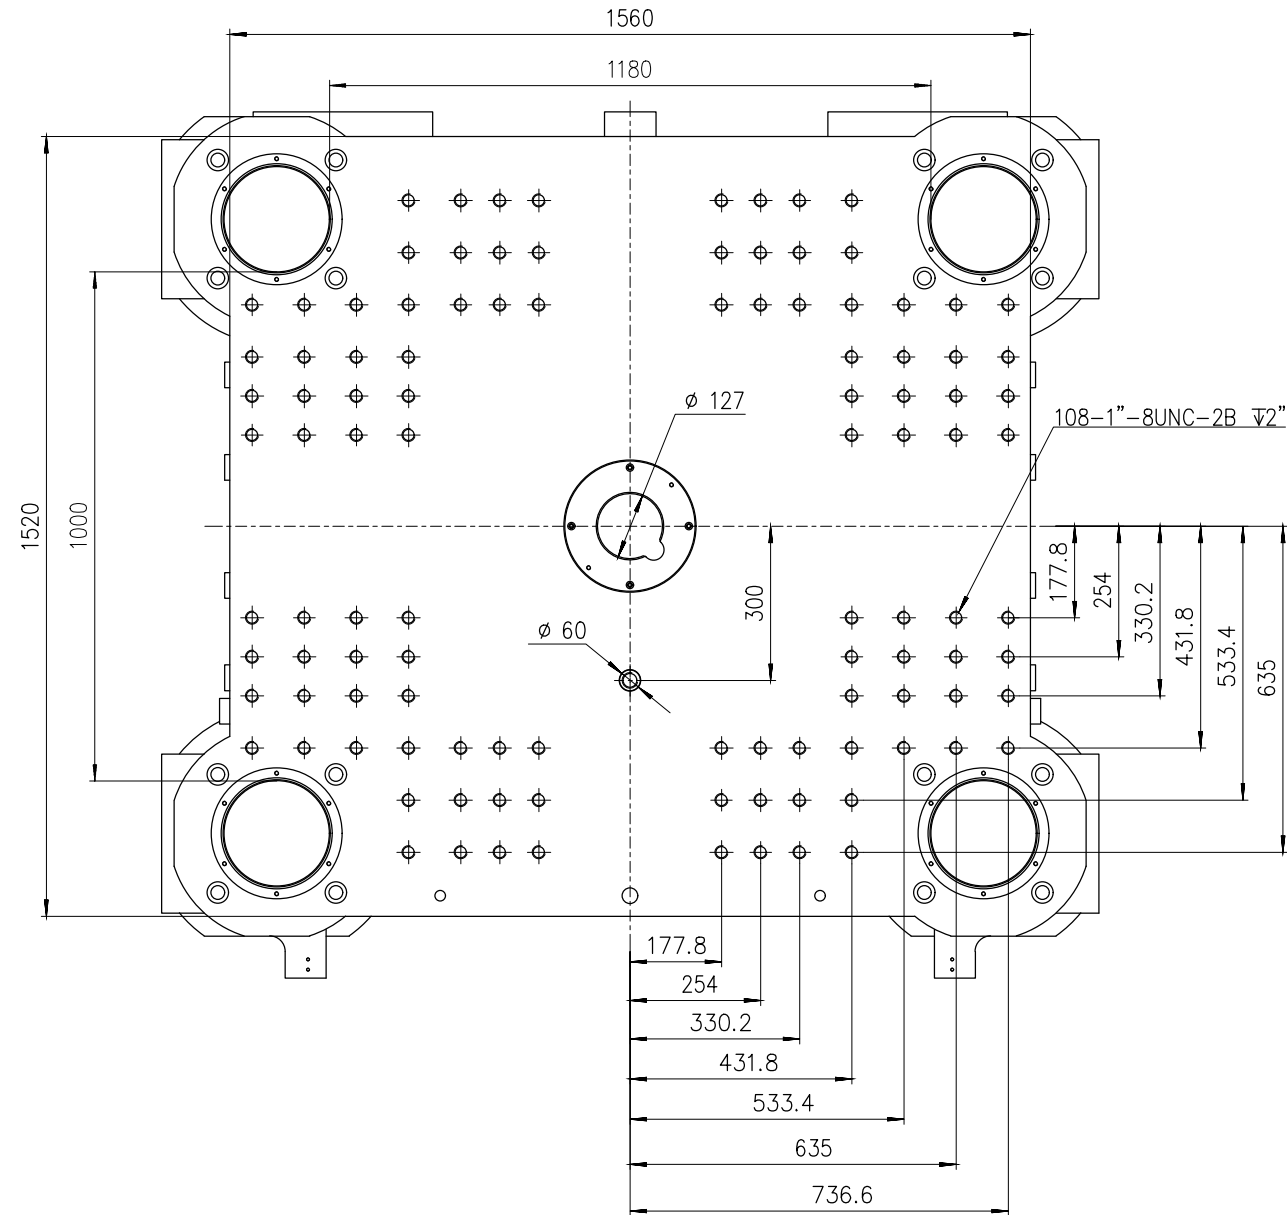

Fixed Platen

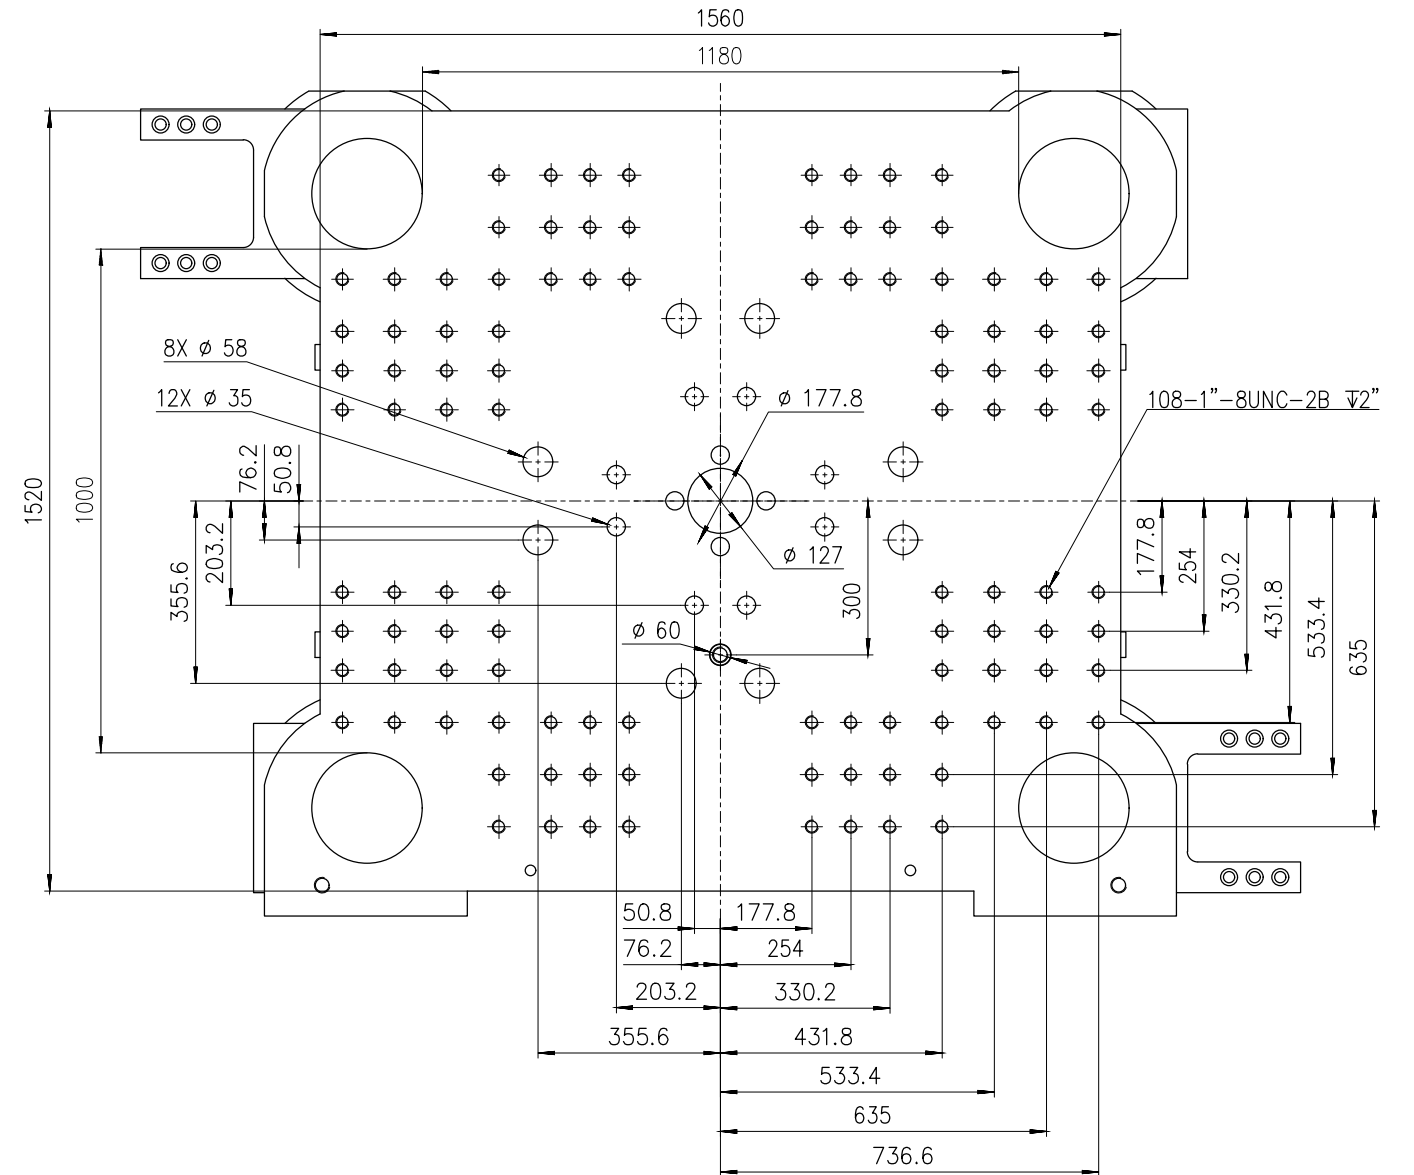

Moving Platen



Title: JUV 9000 Fixed & Moving Platens Platen Drawing

Machine Model: JUV 9000

Machine Serial Number:

Machine Tonnage:

Sheet: 1 of 1

Drawn By: Harry

Date: 1/9/2024

Chkd By: LEON XIE

Date: 1/9/2024

NOT TO SCALE Size: 11 X 17 "B"

Revision Date: Drawing #:

Rev #: 1

Rev #: 2

Rev #: 3

Rev #: 4

Rev #: 5

Units: mm / [in]

Material:

Part:

Part:

Part:

Part:

PLEASE READ:


The designs on this drawing were validated using machine manufacturer's drawings and/or information supplied by Absolute or the customer. It is the responsibility of the customer to review and confirm that all dimensions are consistent with the application intended and in accordance with the facility requirements for space, part clearance, overhead clearance, or any other interference. By signing this document, the customer accepts full responsibility for this design and application.

Customer:

Customer Approval:

Authorized Signature

Notes:

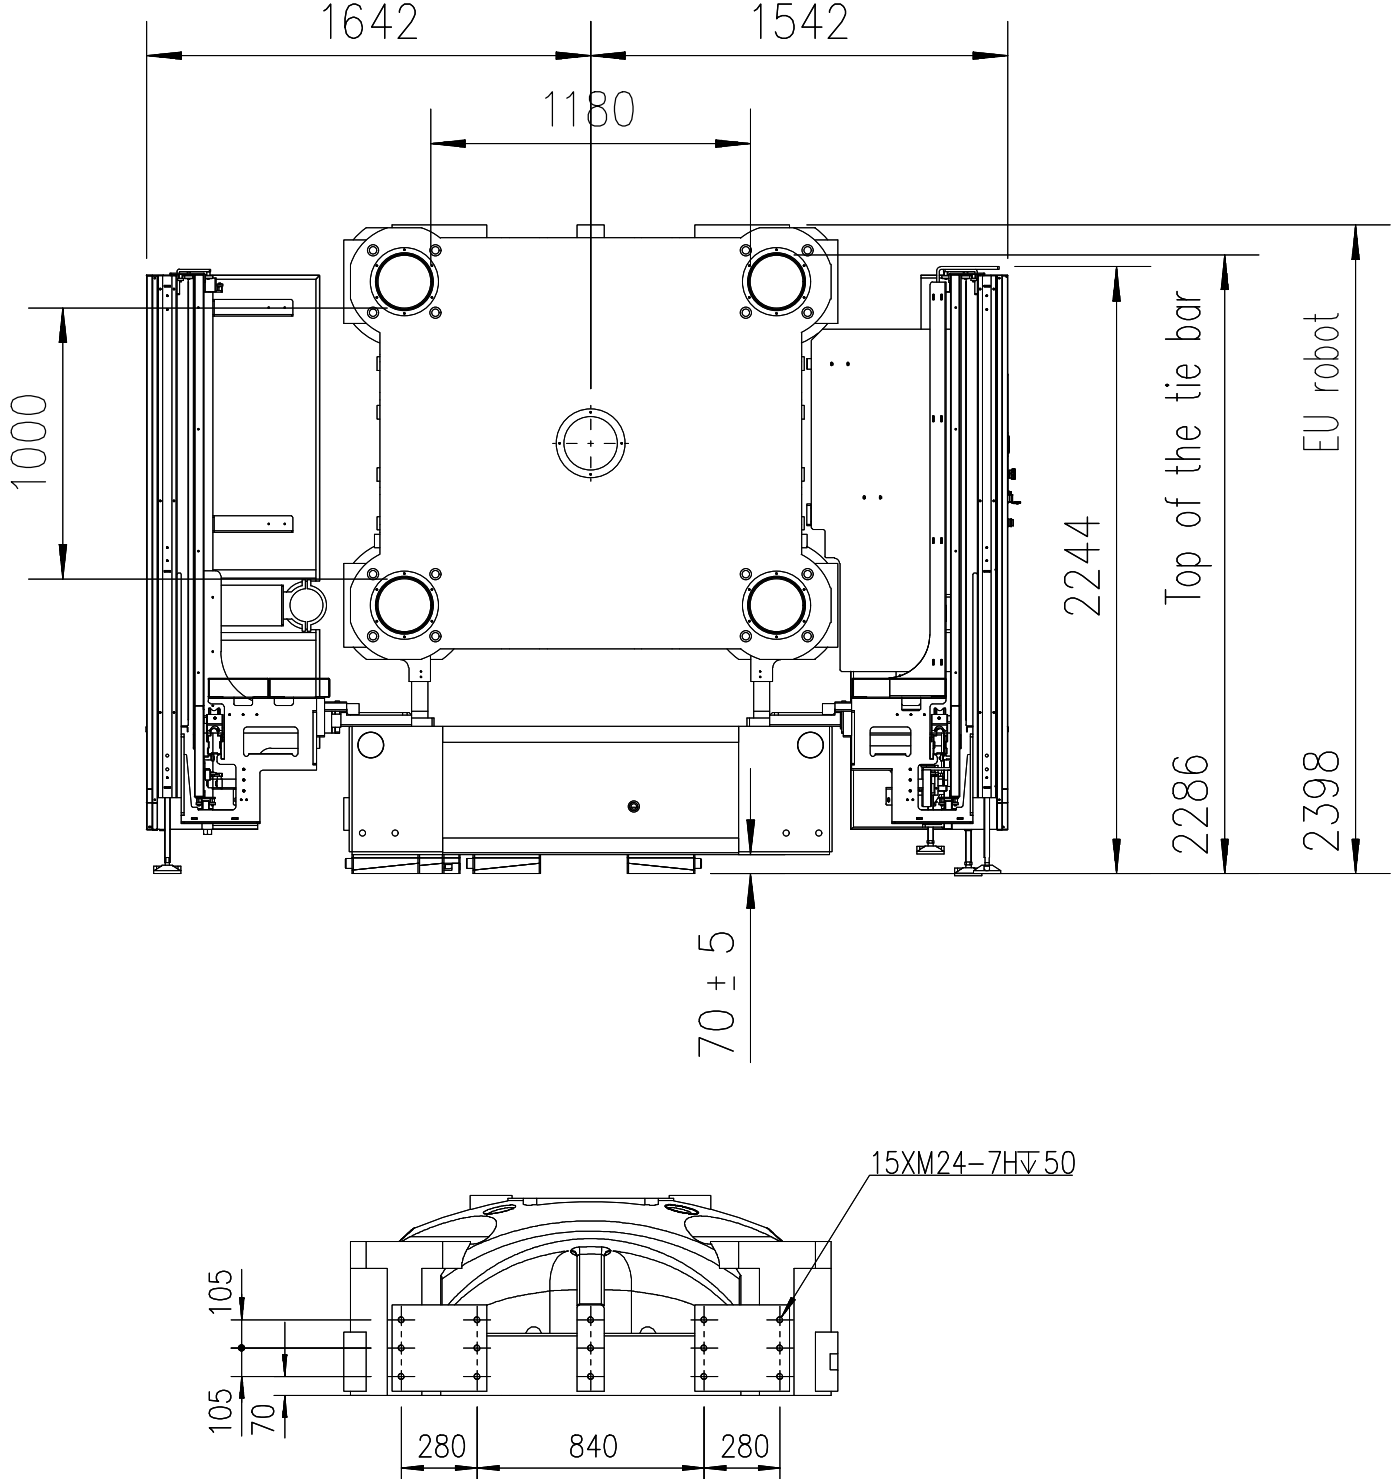

Title: JU V 9000-6750 Robot Mounting Drawing

Machine Model: JU V 9000-6750
Machine Serial Number:
Machine Tonnage:

Sheet: 1 of 1

Drawn By: Harry

Date: 4/9/2024

Chkd By: LEON XIE

Date: 4/9/2024

NOT TO SCALE

Size: 11 X 17 "B"

Units: mm / [in]

Material:

Part:

Part:

Part:

Part:

Part:

PLEASE READ:

The designs on this drawing were validated using machine manufacturer's drawings and/or information supplied by Absolute or the customer. It is the responsibility of the customer to review and confirm that all dimensions are consistent with the application intended and in accordance with the facility requirements for space, part clearance, overhead clearance, or any other interference. By signing this document, the customer accepts full responsibility for this design and application.

Customer:

Customer Approval:

Authorized Signature

Notes: