

JU6500V-2250

JUPITER 5 Series: Two-Platen Servo-Hydraulic



Clamping Unit		JU6500V
Clamping Force	kN	6500
Mold Opening Stroke (Min/Max)	mm	1350/800
Minimum Mold Height	mm	400
Maximum Mold Height	mm	950
Maximum Daylight	mm	1750
Distance Between Tie-Bars (HXV)	mm	1040×910
Platen Dimensions (HXV)	mm	1400x1350
Ejector Stroke	mm	250
Ejector Force	kN	110
Maximum Mold Weight*	t	9.5


Specification



JU6500V-2250

JUPITER 5 Series: Two-Platen Servo-Hydraulic

Injection Unit		2250		
Screw & Barrel Designation		A	B	C
Screw Diameter	mm	65	70	75
Screw L/D Ratio	L/D	21.5	20	18.7
Injection Volume (theoretical)	cm ³	1068	1239	1422
Injection Weight (PS)	g	972	1127	1294
Injection Rate (PS)	g/s	459	532	611
Injection Pressure	MPa	182	157	137
Injection Pressure (max)*	MPa	212	183	159
Plasticizing Rate (GPPS)	g/s	62	71.1	80.4
Plasticizing Rate (HDPE)	g/s	93.5	111.4	124.6
Screw Speed	rpm	240	240	240

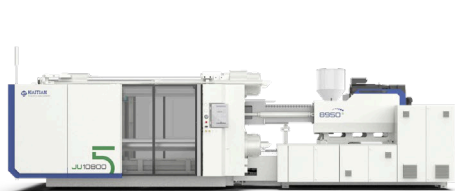


JU6500V-2250

JUPITER 5 Series: Two-Platen Servo-Hydraulic


Other		
Pump Motor Power	kW	65
Heater Power	kW	32
Machine Dimension (LxWxH)	m	7.16×2.58×2.51
Machine Weight	t	23
Hopper Capacity	kg	50
Oil Tank	l	430

***NOTE:**

1. Injection Pressure (max) uses the machine's regeneration oil circuit to increase the injection pressure. This function will reduce injection control and repeatability. The standard "Injection Pressure" specification is the maximum injection pressure in a normal operating mode.
2. Moving platen max mold weight is 2/3 of total max mold weight.
3. Electric screw drive (screw rotate) is standard for injection units under 11500. For injection units 11500 and above electric screw drive is optional.
4. Machine dimensions and weights are based on the international standard configuration and are for reference only. Any options or country specific requirements will affect this. Contact Cabletech Marketing service department for machine specific information.
5. Power requirements are based on the international standard configuration and are for reference only. Any options or country specific requirements will affect this. Contact Cabletech Marketing service department for machine specific information.

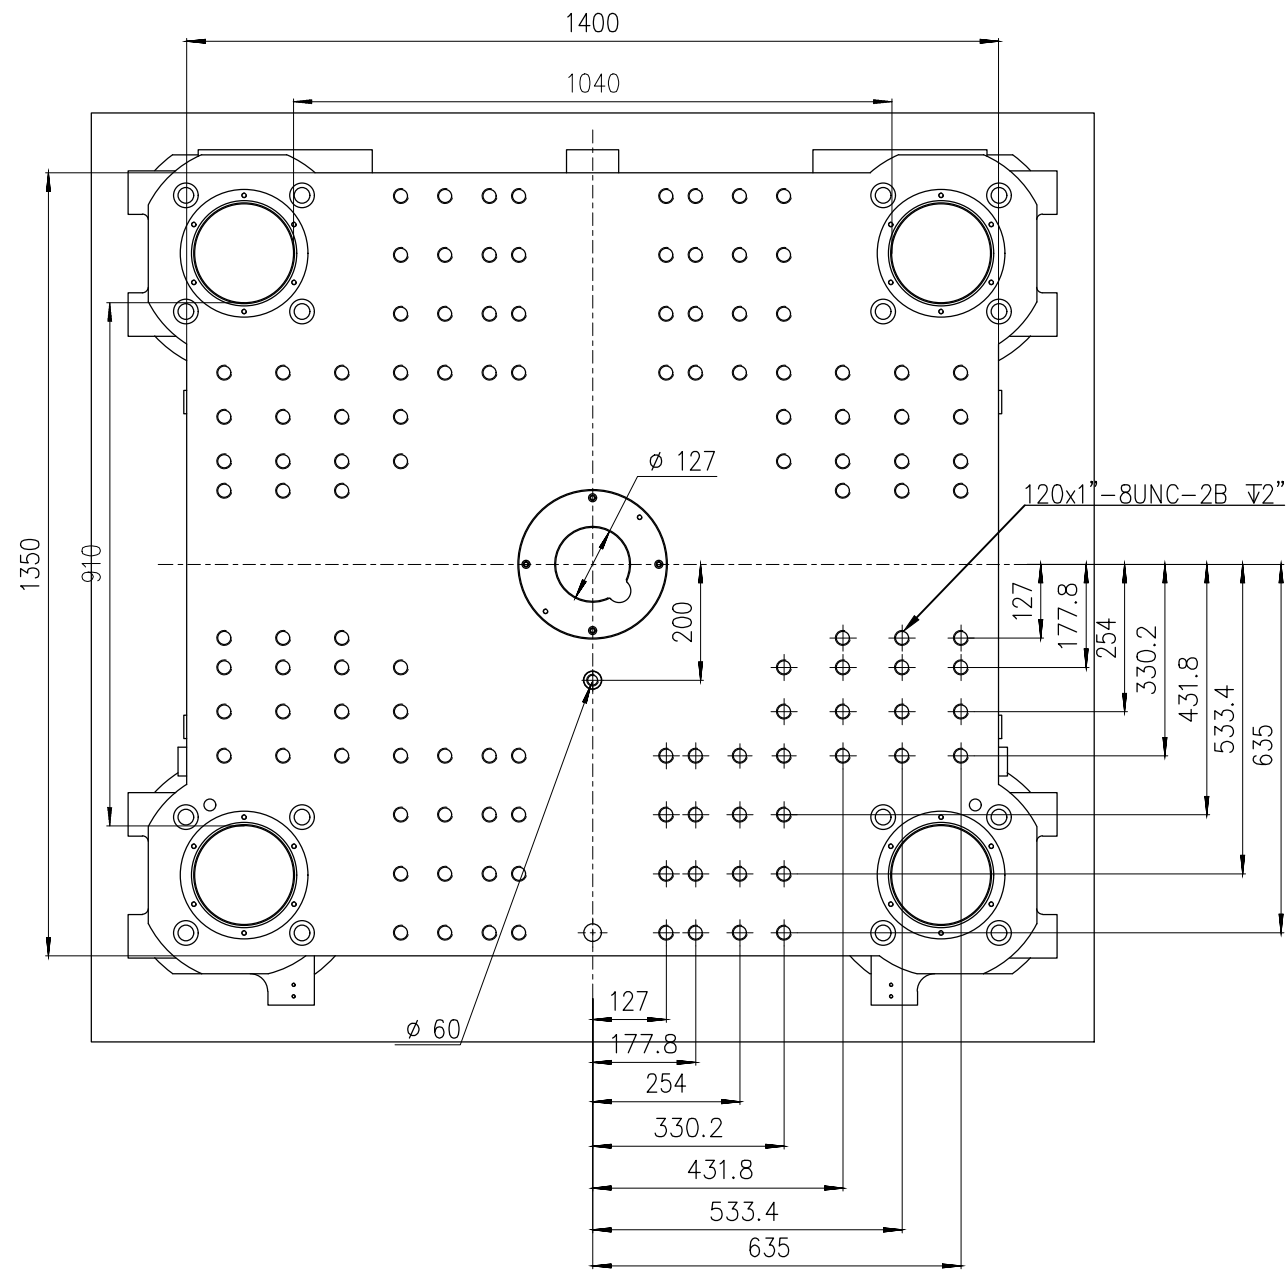

Fixed Platen

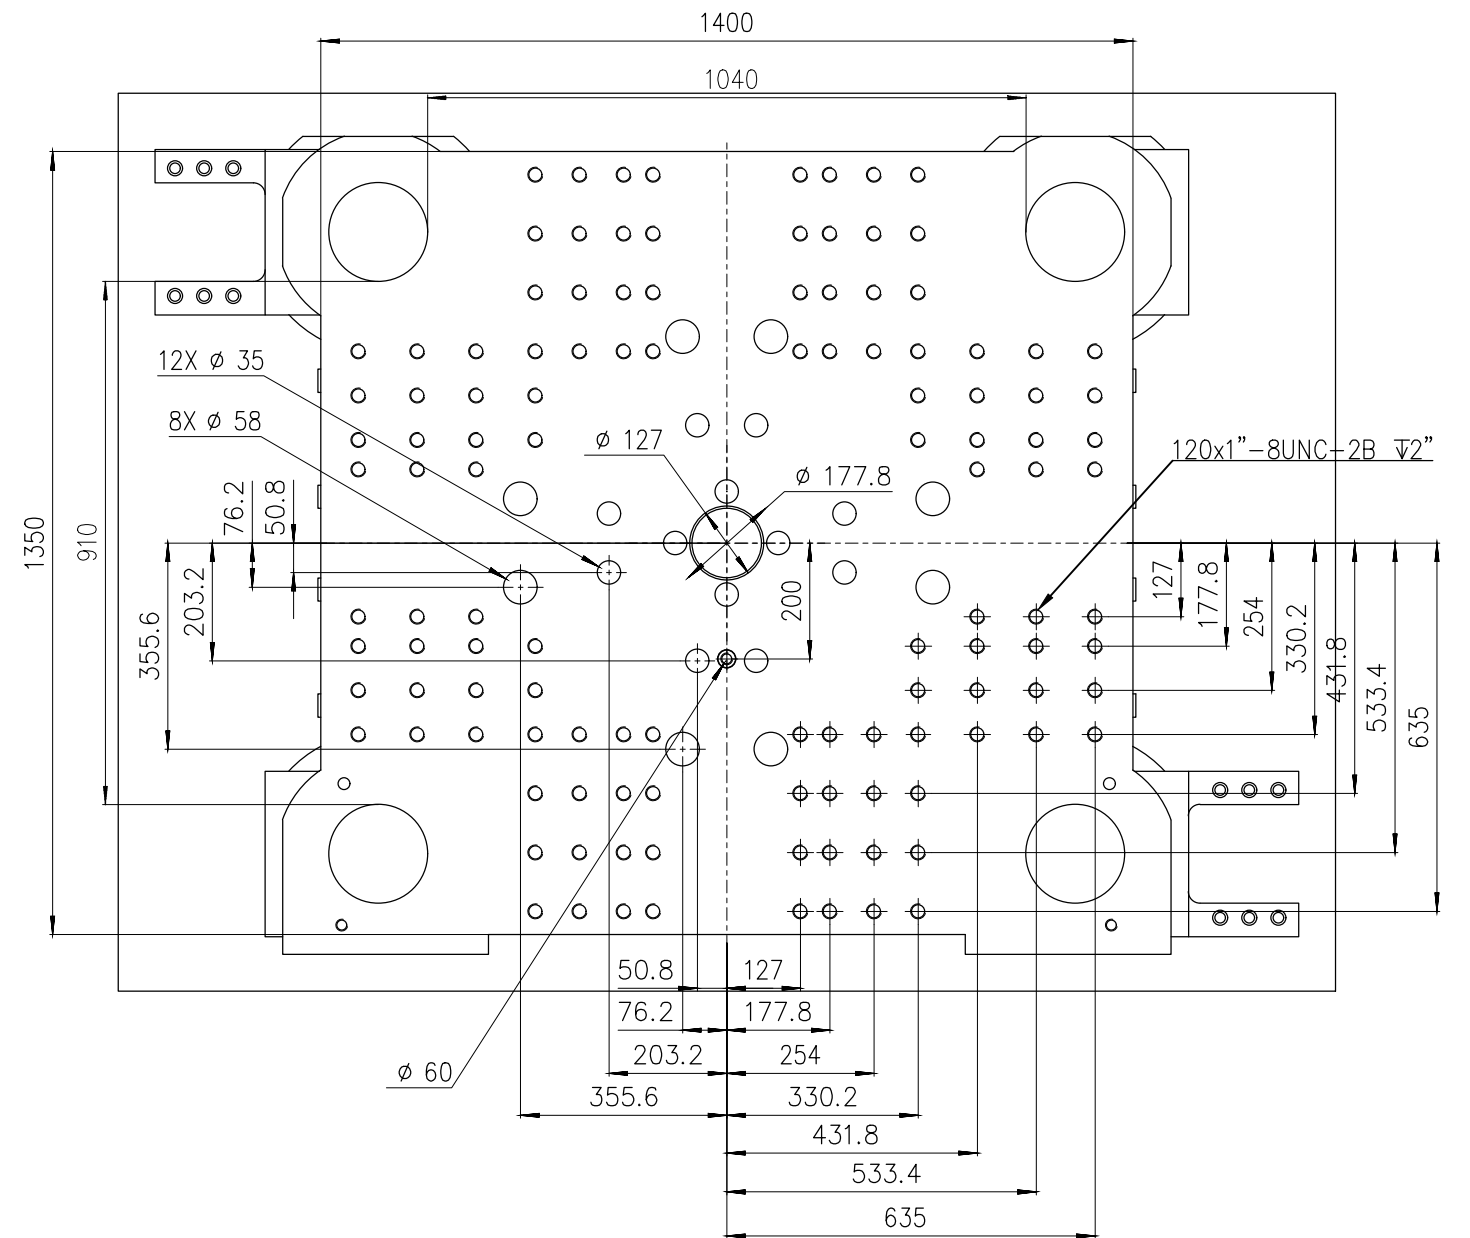

Moving Platen



Title: JUV 6500 Fixed & Moving Platens Drawing				
Machine Model: JUV 6500			Sheet: 1 of 1	
Machine Serial Number:			Drawn By: Harry	Date: 1/9/2024
Machine Tonnage:			Chkd By: LEON XIE	Date: 1/9/2024
Revision	Date:	Drawing #:	NOT TO SCALE	Size: 11 X 17 "B"
Rev #: 1			Units: mm / [in]	
Rev #: 2			Material:	
Rev #: 3			Part:	
Rev #: 4			Part:	
Rev #: 5			Part:	

PLEASE READ:


The designs on this drawing were validated using machine manufacturer's drawings and/or information supplied by Absolute or the customer. It is the responsibility of the customer to review and confirm that all dimensions are consistent with the application intended and in accordance with the facility requirements for space, part clearance, overhead clearance, or any other interference. By signing this document, the customer accepts full responsibility for this design and application.

Customer:

Customer Approval:

Authorized Signature

Notes:

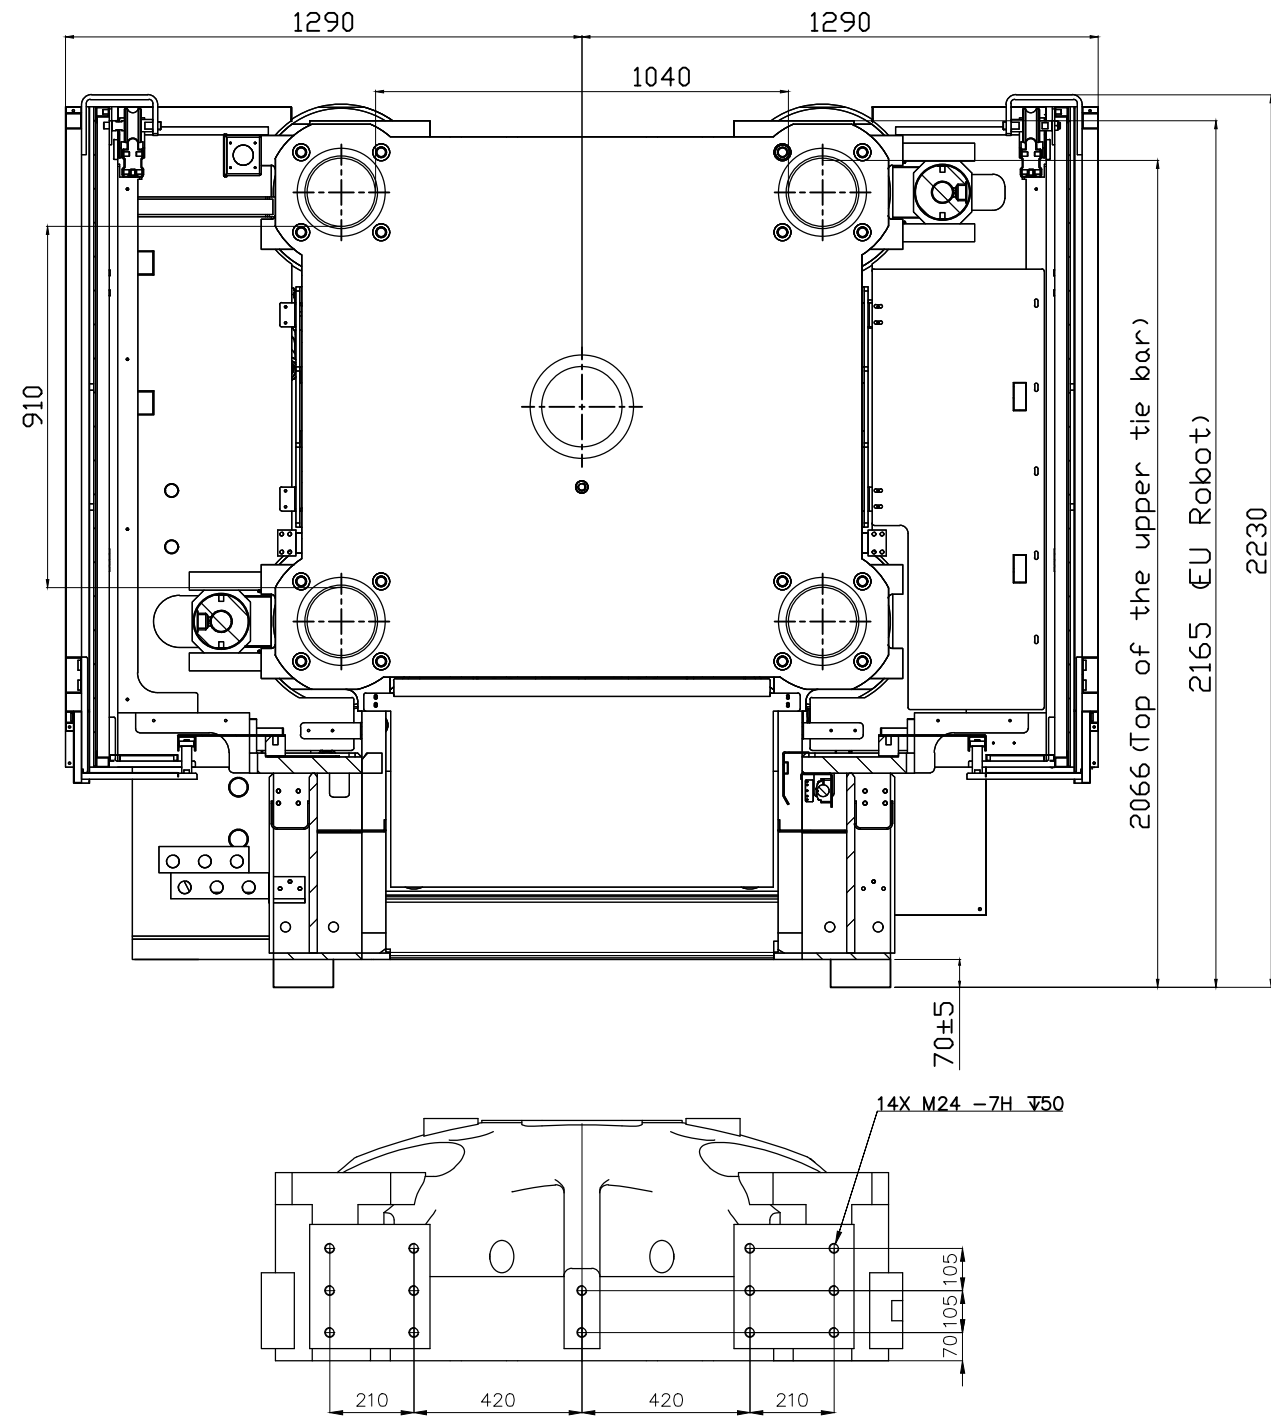

Title: JU V 6500-4650 Robot Mounting Drawing

Machine Model: JU V 6500-4650
Machine Serial Number:
Machine Tonnage:

Sheet: 1 of 1

Drawn By: Harry

Date: 4/9/2024

Chkd By: LEON XIE

Date: 4/9/2024

NOT TO SCALE

Size: 11 X 17 "B"

Units: mm / [in]

Material:

Part:

Part:

Part:

Part:

Part:

PLEASE READ:

The designs on this drawing were validated using machine manufacturer's drawings and/or information supplied by Absolute or the customer. It is the responsibility of the customer to review and confirm that all dimensions are consistent with the application intended and in accordance with the facility requirements for space, part clearance, overhead clearance, or any other interference. By signing this document, the customer accepts full responsibility for this design and application.

Customer:

Customer Approval:

Authorized Signature

Notes: