

JU5500V-2250

JUPITER 5 Series: Two-Platen Servo-Hydraulic



Clamping Unit		JU5500V
Clamping Force	kN	5500
Mold Opening Stroke (Min/Max)	mm	1300/750
Minimum Mold Height	mm	350
Maximum Mold Height	mm	900
Maximum Daylight	mm	1650
Distance Between Tie-Bars (HXV)	mm	920×830
Platen Dimensions (HXV)	mm	1280x1260
Ejector Stroke	mm	250
Ejector Force	kN	110
Maximum Mold Weight*	t	8


Specification



JU5500V-2250

JUPITER 5 Series: Two-Platen Servo-Hydraulic

Injection Unit		2250		
Screw & Barrel Designation		A	B	C
Screw Diameter	mm	65	70	75
Screw L/D Ratio	L/D	21.5	20	18.7
Injection Volume (theoretical)	cm3	1068	1239	1422
Injection Weight (PS)	g	972	1127	1294
Injection Rate (PS)	g/s	372	431	495
Injection Pressure	MPa	182	157	137
Injection Pressure (max)*	MPa	212	183	159
Plasticizing Rate (GPPS)	g/s	62	71.1	80.4
Plasticizing Rate (HDPE)	g/s	93.5	111.4	124.6
Screw Speed	rpm	240	240	240

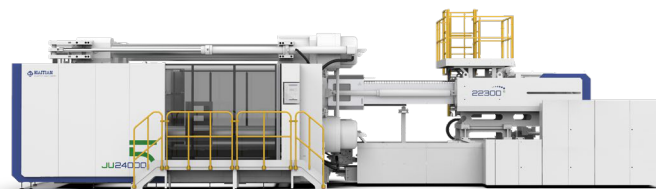


JU5500V-2250

JUPITER 5 Series: Two-Platen Servo-Hydraulic


Other		
Pump Motor Power	kW	55
Heater Power	kW	32
Machine Dimension (LxWxH)	m	7.04×2.35×2.51
Machine Weight	t	21
Hopper Capacity	kg	50
Oil Tank	l	430

***NOTE:**

1. Injection Pressure (max) uses the machine's regeneration oil circuit to increase the injection pressure. This function will reduce injection control and repeatability. The standard "Injection Pressure" specification is the maximum injection pressure in a normal operating mode.
2. Moving platen max mold weight is 2/3 of total max mold weight.
3. Electric screw drive (screw rotate) is standard for injection units under 11500. For injection units 11500 and above electric screw drive is optional.
4. Machine dimensions and weights are based on the international standard configuration and are for reference only. Any options or country specific requirements will affect this. Contact Cabletech Marketing service department for machine specific information.
5. Power requirements are based on the international standard configuration and are for reference only. Any options or country specific requirements will affect this. Contact Cabletech Marketing service department for machine specific information.

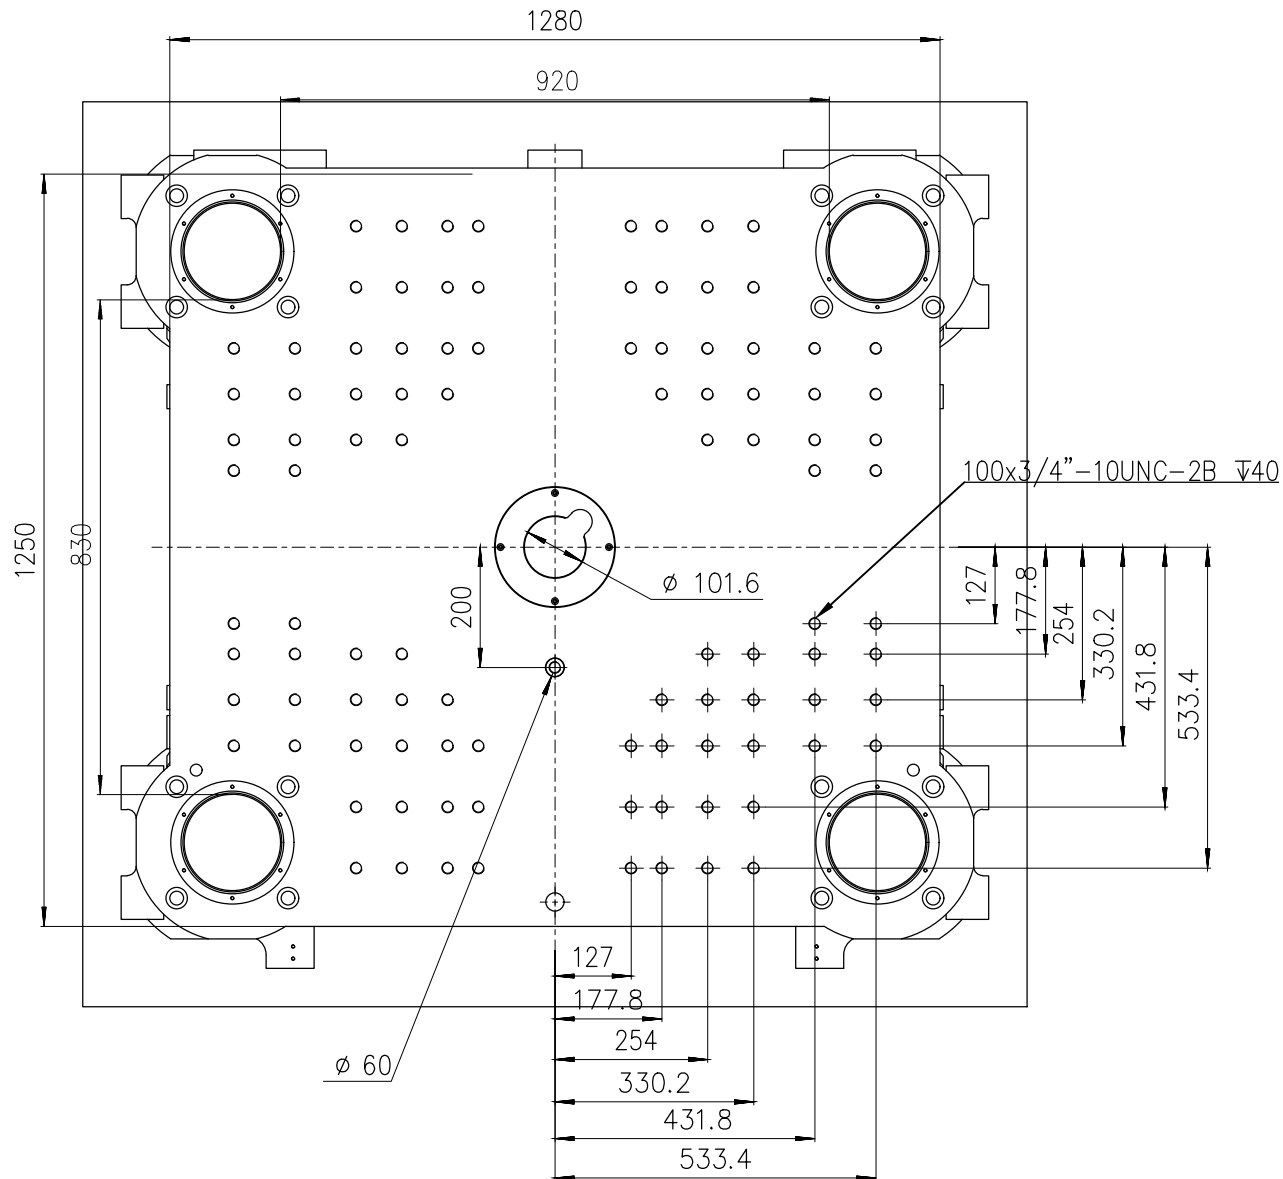

Fixed Platen

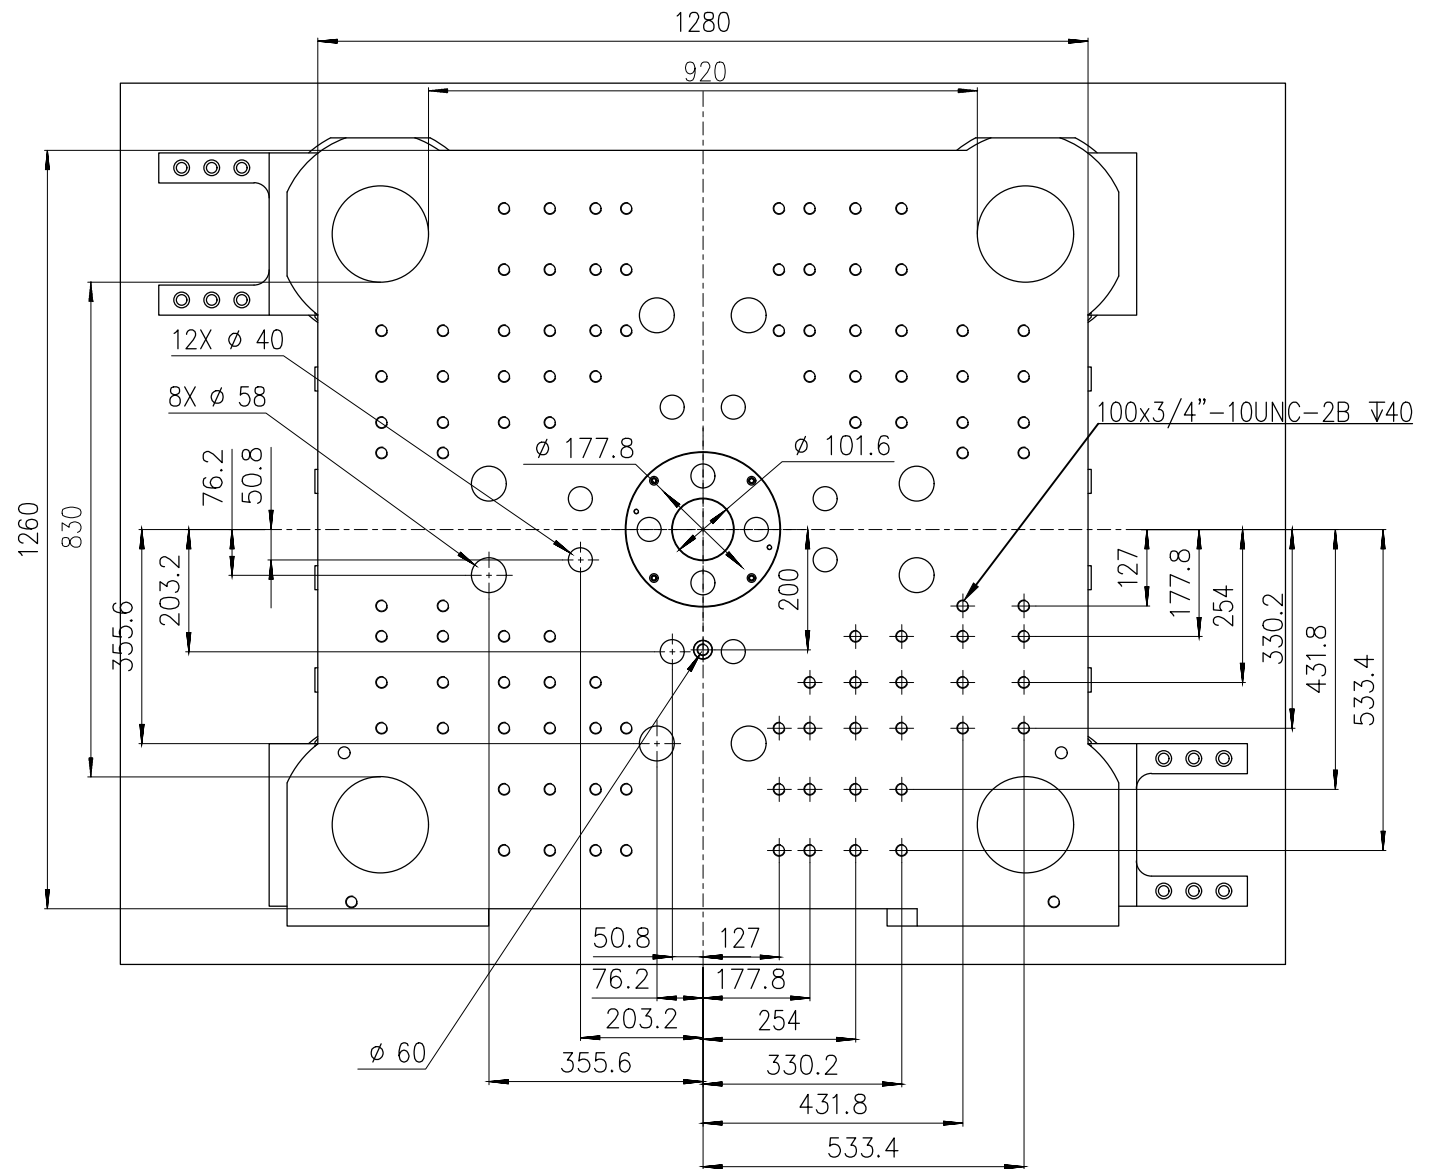

Moving Platen



Title: JUV 5500 Fixed & Moving Platens Drawing

Machine Model: JUV 5500
Machine Serial Number:
Machine Tonnage:

Sheet: 1 of 1

Drawn By: Harry

Date: 1/9/2024

Chkd By: LEON XIE

Date: 1/9/2024

Revision Date: Drawing #:

Rev #: 1

Rev #: 2

Rev #: 3

Rev #: 4

Rev #: 5

NOT TO SCALE

Size: 11 X 17 "B"

Units: mm / [in]

Material:

Part:

Part:

Part:

Part:

PLEASE READ:


The designs on this drawing were validated using machine manufacturer's drawings and/or information supplied by Absolute or the customer. It is the responsibility of the customer to review and confirm that all dimensions are consistent with the application intended and in accordance with the facility requirements for space, part clearance, overhead clearance, or any other interference. By signing this document, the customer accepts full responsibility for this design and application.

Customer:

Customer Approval:

Authorized Signature

Notes:

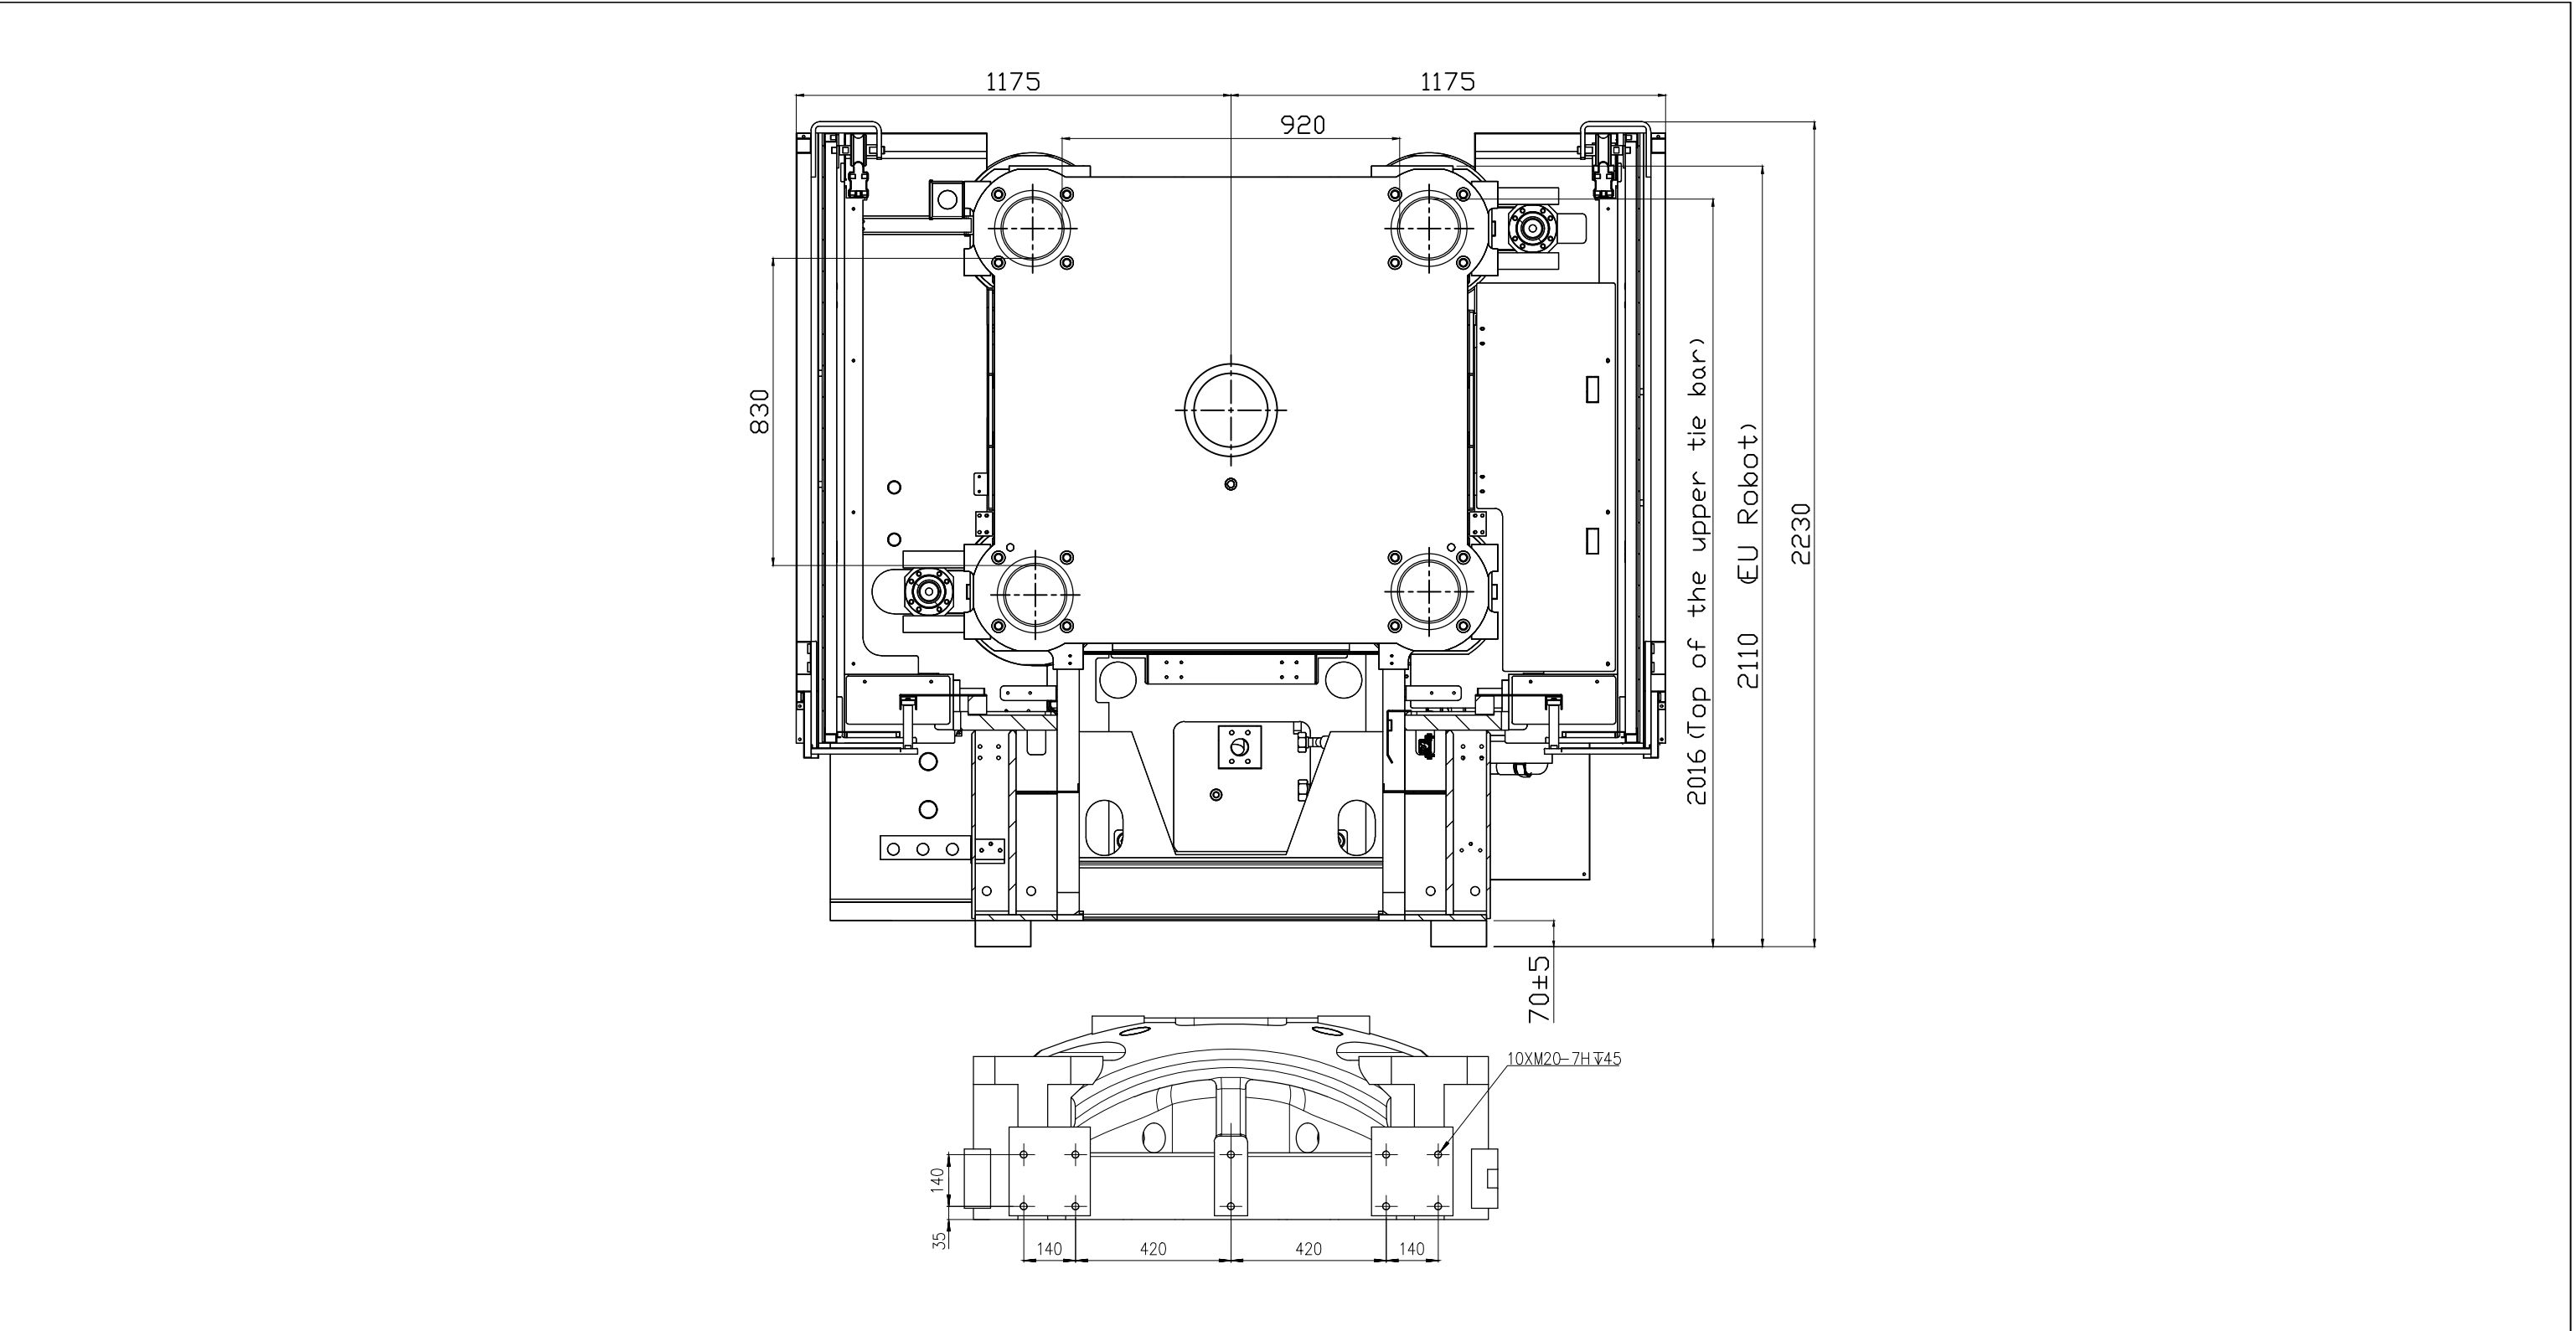

Title: JU V 5500-3450 Robot Mounting Drawing				
Machine Model: JU V 5500-3450			Sheet: 1 of 1	
Machine Serial Number:			Drawn By: Harry	Date: 4/9/2024
Machine Tonnage:			Chkd By: LEON XIE	Date: 4/9/2024
Revision	Date:	Drawing #: Robot Mounting	NOT TO SCALE	Size: 11 X 17 "B"
Rev #: 1			Units: mm / [in]	
Rev #: 2			Material:	
Rev #: 3			Part:	
Rev #: 4			Part:	
Rev #: 5			Part:	

PLEASE READ: The designs on this drawing were validated using machine manufacturer's drawings and/or information supplied by Absolute or the customer. It is the responsibility of the customer to review and confirm that all dimensions are consistent with the application intended and in accordance with the facility requirements for space, part clearance, overhead clearance, or any other interference. By signing this document, the customer accepts full responsibility for this design and application.	
Customer:	Customer Approval: Authorized Signature

Notes:
